


FOR RESIDENTIAL AND COMMERCIAL USE


- OUTDOOR GAZEBO
- HOT TUB COVER
- HOLIDAY DECORATION
- GARDEN GREENHOUSE
- OUTDOOR DINING
- ROOFTOP BARS
- SIDEWALK CAFES
- WINTER BUSINESS ACCESSORY
- ATTRACT NEW CLIENTELE

ONE HOUR SETUP
SEATS UP TO IO GUESTS COMFORTABLY
TRANSPARENT WITH COVER
NO TOOLS REQUIRED

COVID-I9 COMPLIANT

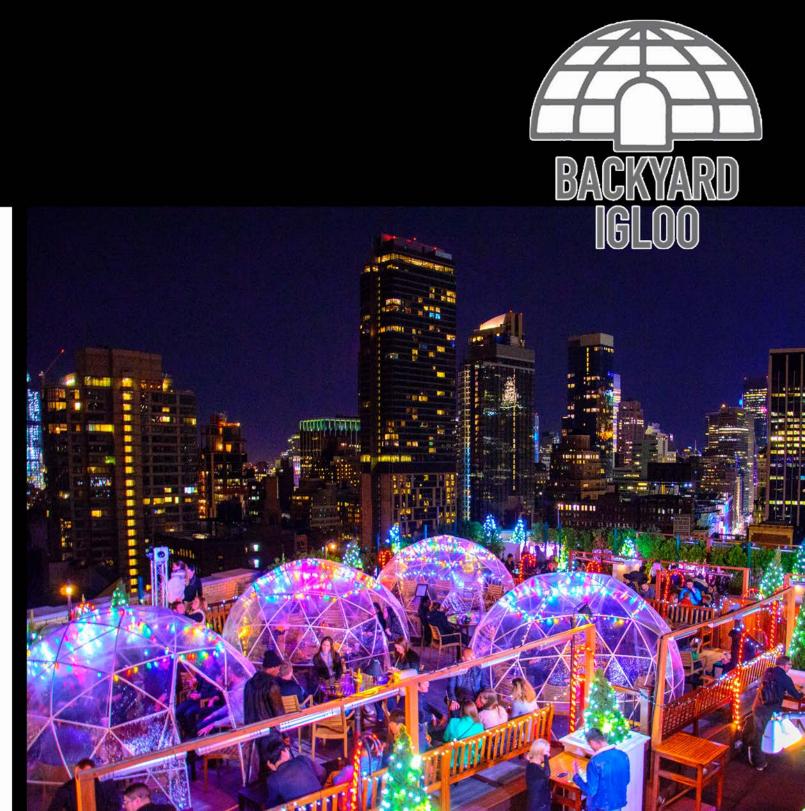



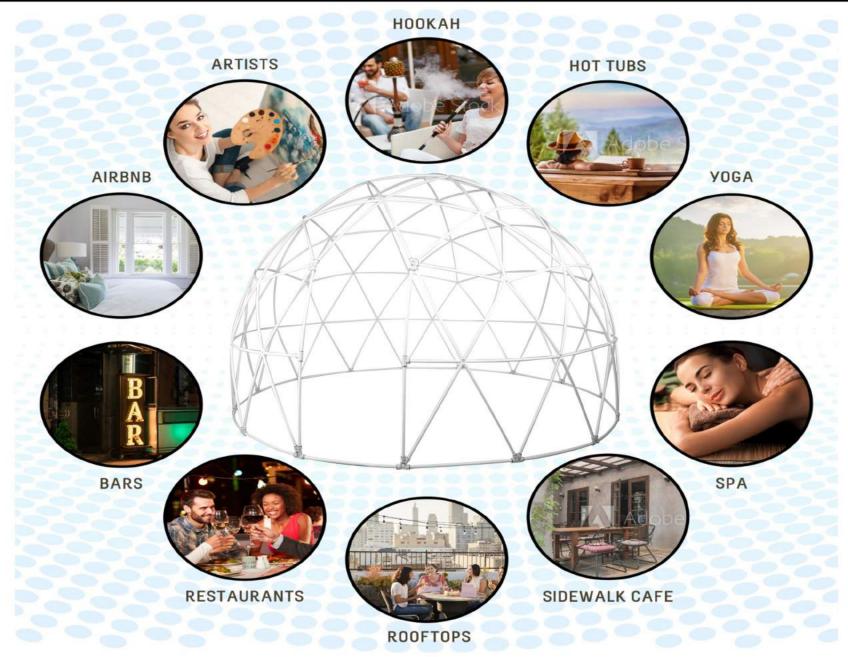





WEIGHT



BACKYARD IGLOO : 69 lbs Canopy Cover: 25 lbs Mosquito Cover: 15 lbs

COVER MATERIAL



Non-toxic soft transparent PVC Extra Thick / UV resisted / -4F Cold crack resisted / NPFA 701 - ASTM E84 Fire Retardant

WIND RESISTANCE



Up to 40mi/h (7 Bft) (when properly fixed with our anchorage kit)

CONSTRUCTION



BACKYARD
The IGLOO has a practical connector system which means no screws are required for assembly.

MAX HEIGHT



7' 2"

SNOW RESISTANCE



Maximum snow load capacity: 111 lbs

FRAME MATERIAL



PC Interlock

ENTRANCE (H X W)



5' 11" × 2' 4"



SPECS

COLORS



Cover: Transparent Canopy Cover: Creme Mosquito Cover: White

Frame Color: White

PACKAGE DIMENSIONS (L X W X H)



BACKYARD IGLOO : 31" × 16" × 12"

Canopy Cover: 24" × 16" × 7" Mosquito Cover: 24" × 16" × 7"

ANCHORAGE (HARD SURFACES)



On hard surfaces such as concrete, wood deck, etc., use the provided metal clamps with suitable screws.

ANCHORAGE (SOFT GROUNDS)



On soft surfaces such as soil, lawn, etc use provided PC nails to fix your Backyard Igloo to the ground.

DIMENSIONS



Diameter: 11' 9" Base Area: 107 ft²

ASSEMBLY TIME



Approximately 1 hour (with 2 people)

WINDOW VENTS



2


RAIN



Water-repellent



SIZE

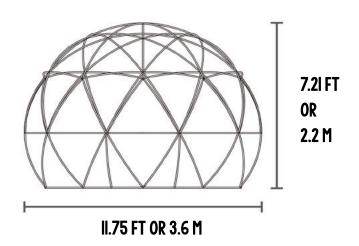




QUALITY

SNOW LYING: 111 LBS OR 50 KG



WIND UP TO 40 MPH OR 64 KM/H

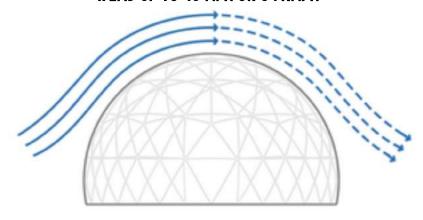

BACKYARD IGLOO

STANDARD ACCESSORIES

HEAT SEALED WINDOW



MAGNETIZED HEAT SEALED ZIPPER




I. PLASTIC NAIL

IO PC PP MATERIAL














HEAT SEALED COVER



VELCRO FIXING



3. SPECIAL CONNECTORS

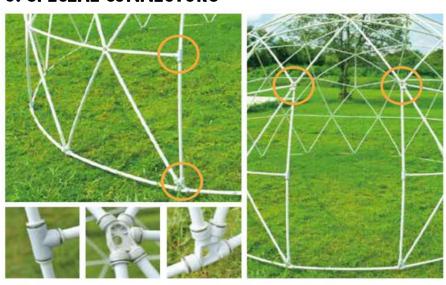



PVC COVER





OPTIONAL MOSQUITO COVER





